


User manual of the Wi-Fi Weather Station



Description of the device

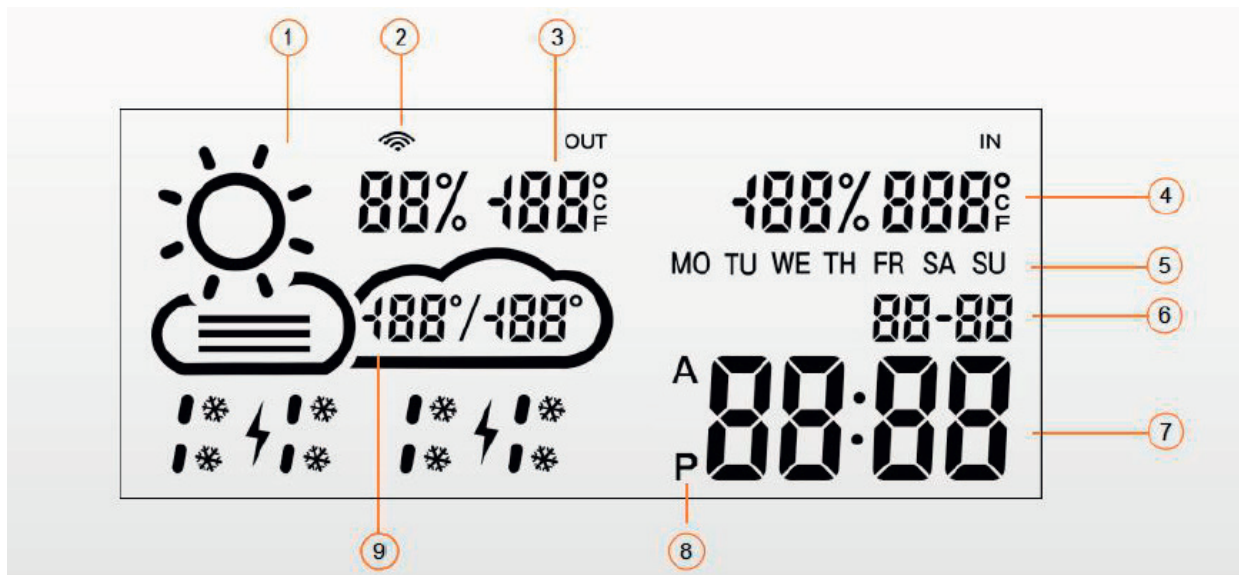

1. Current weather

- sunny
- partly cloudy
- cloudy
- rainy
- stormy
- snowy

2. The Wi-Fi icon

3. Outdoor temperature and humidity

4. Indoor temperature

5. Day of week (abbreviation)

6. Date (dd/mm)

7. Time

8. Time format (12/24)

9. Daytime temperature range (forecast)



Description of the device

Technical data

1. Temperature measurement resolution:	1°
2. Humidity resolution:	1°
3. Supply voltage:	DC 12V / 24V
4. Display size on the mirror:	7,3"
5. Graphic size on the mirror:	158 x 68mm
6. Product size on the mirror:	186 x 88 x 11mm


Features

- 1. Automatic time and date setting with Wi-Fi signal**
- 2. Time format 12/24 hours**
- 3. Adjusting the date (dd-mm / mm-dd)**
- 4. Display in °C / °F degrees**
- 5. Brightness control**
- 6. Night view brightness control**
- 7. Weather forecast (current day and tomorrow)**
- 8. Possibility of manual location selection**



Wi-Fi Weather Station configuration

1. After connecting the power supply to the mains, the station goes to configuration mode
 - The display should show "SCAN".
 - If the station displays "Error" reset the station by unplugging it three times and reconnecting it to the power!
2. To set the station you need to download free application called "WiseMirror".
(use Google Play or App Store)
3. Start the application on your device.
4. Click on the "+" sign in the upper right corner in the application

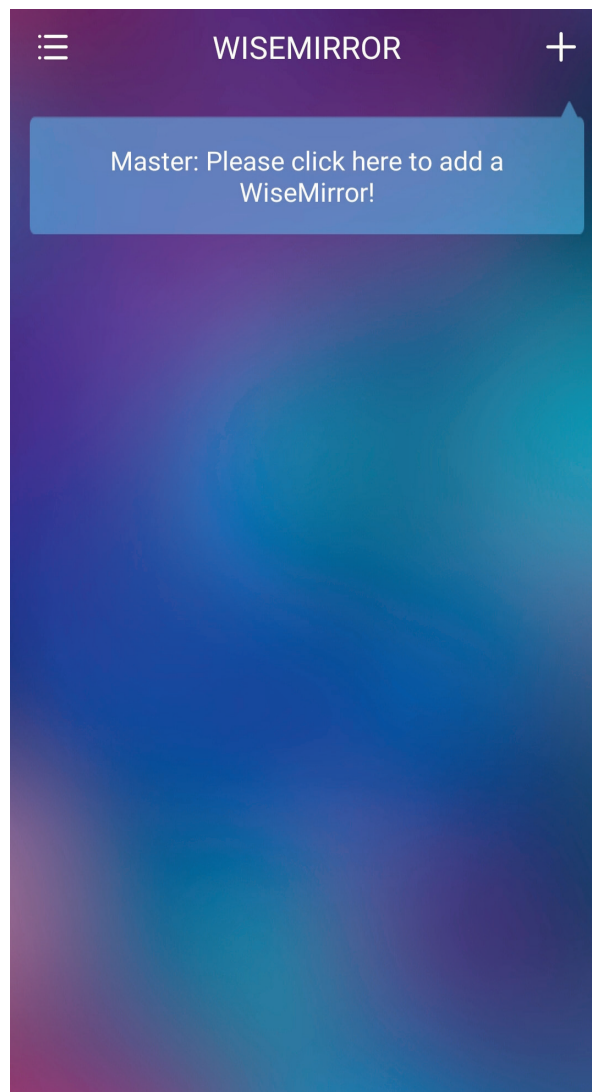



Wi-Fi Weather Station configuration

5. Then select your Wi-Fi network and enter the password for your router. Click on „Next” so the application can connect the device to the internet.

< EZ MODE AP mode

Please enter the Wifi password

TP-Link_AP_891A_2 >>

..... ✓

Only supports 2.4Ghz Wifi network

Next

View help (?)



Wi-Fi Weather Station configuration

6. The station will automatically connect to the Wi-Fi network and will pair with the device with that application.





Application settings


The main interface shows devices connected to the application at the moment.





Application settings

To go to application settings select your device in the main interface.

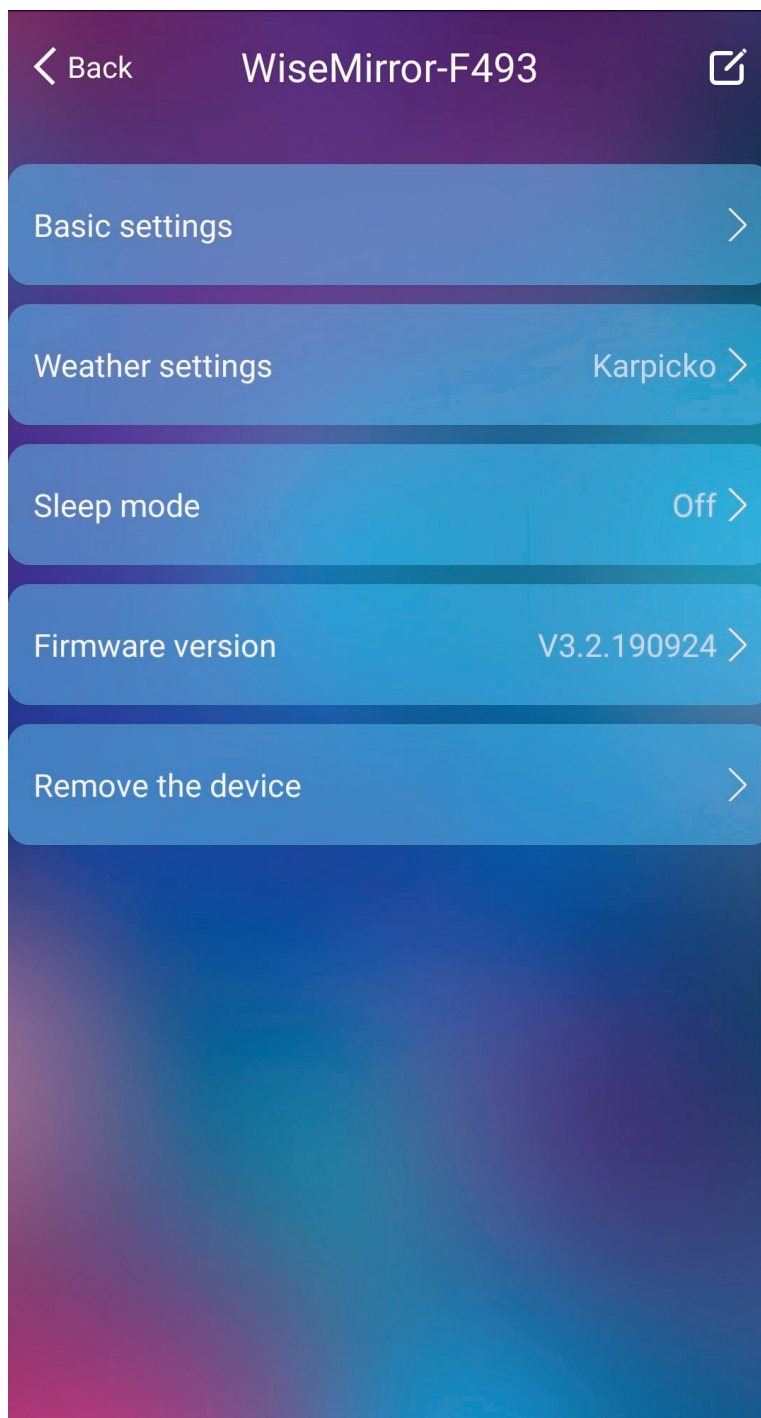




Application settings

Basic settings

- Time settings "24 hours format" – 12h or 24h
- Date settings "Day-Month format" - dd-mm or mm-dd
- Temperature settings "Degrees Celsius" - °C or °F
- Display control "Normal-brightness" – levels to choose 30%, 60% or 100%.

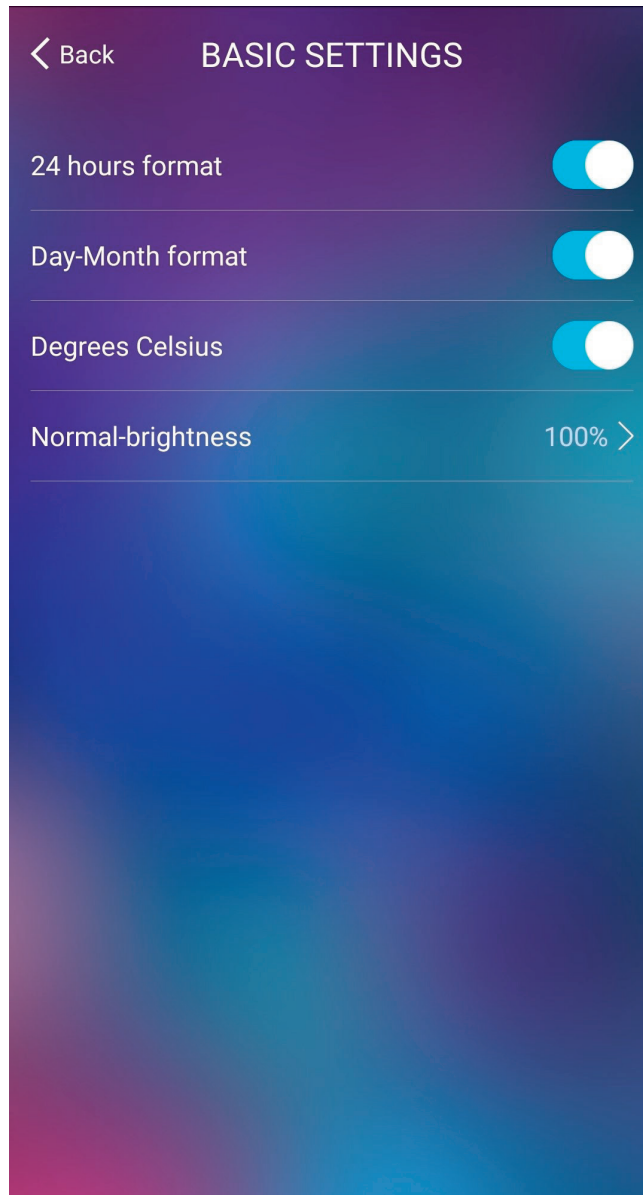




Application settings

Weather settings

1. After selecting the “Weather Scroll” option, the station will alternately show the current weather and the forecast weather for tomorrow.
2. In the “Regional Settings” field set automatic location download or manually select a city.

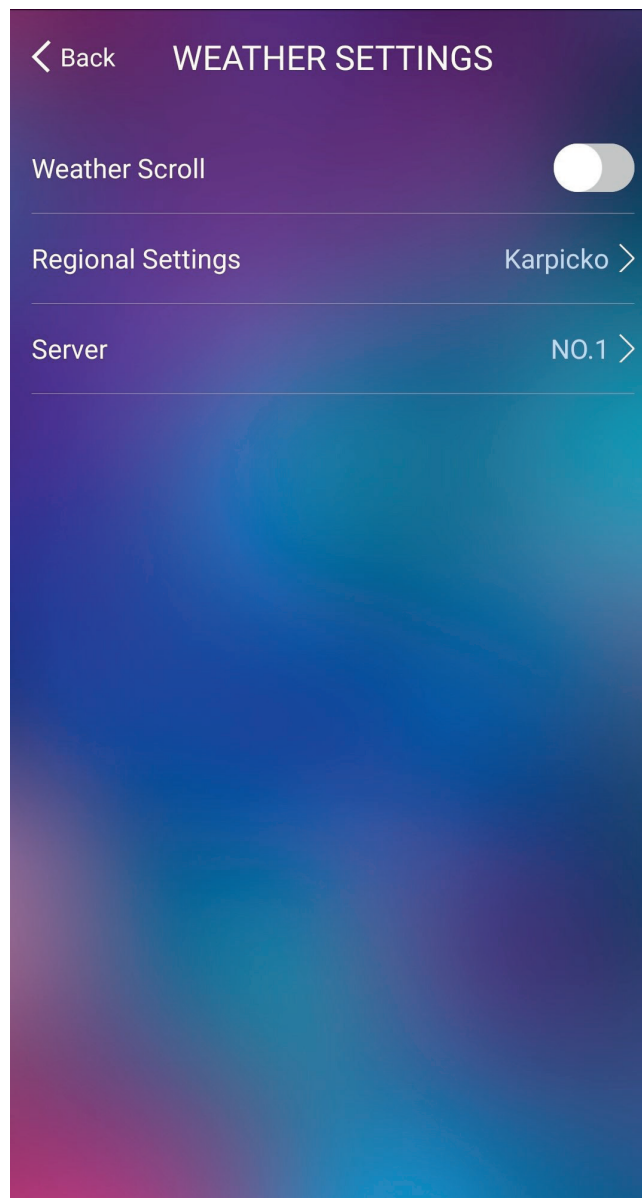




Application settings

“Sleep mode” allows you to apply saved brightness mode of display at selected time intervals. To turn on sleep mode select “Enabled”. Then select the start and the end in tabs “Starting time” and “End Time”. Then in the “Sleep-brightness” select the appropriate percentage of lighting.

The screenshot displays two overlapping settings screens. The background screen is titled "SLEEP MODE" and features a toggle switch for "Enabled" (currently off), and three settings with chevron arrows: "Starting time" (09:54), "End Time" (09:55), and "Sleep-brightness" (20%). The foreground screen is titled "SLEEPING TIME" and shows two time selection tables. The "Start:" table has columns for hours (07-11) and minutes (52-56), with 09:54 selected. The "End:" table has columns for hours (07-11) and minutes (53-57), with 09:55 selected.

Hour	Minute
07	52
08	53
09	54
10	55
11	56

Hour	Minute
07	53
08	54
09	55
10	56
11	57



ARTFORMA

FORAM Sp. z o.o. sp. k.
Karpicko, ul. Jeziorna 3, 64-200 Wolsztyn

Mail EU: info@artforma.eu; Mail PL: biuro@artforma.eu
+48 68 422 73 65

We work from Monday to Friday from: 9: 00 AM to 3. 00 PM